


HSK – NC DRILL Prihvati

BORING SYSTEM

SQUARE BITE

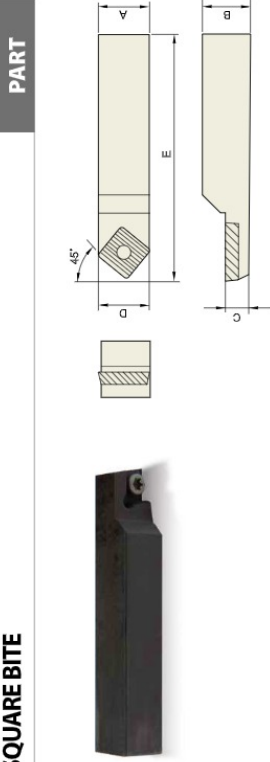

PART

Unit: mm

SIZE	CLASSIFICATION	EDP No.	A	B	C	D	E	SCREW	WRENCH	INSERT
SBC08-45		P2775456	08	08	6.3	8.9	70	SSB-2506	T7	CCMT0602
SBC10-45		P2775457	10	10	7	10.39	70	SSB-2506	T7	CCMT0602
SBC13-45		P2775458	13	13	10	13.6	80	SSB-4009	T15	CCMT09T3
SBC16-45		P2775459	16	16	11	16.68	100	SSB-5012	T15	CCMT1204
SBC19-45		P2775460	19	19	11	19.68	100	SSB-5012	T15	CCMT1204
SBC25-45		P2775461	25	25	12.5	25.68	120	SSB-5012	T15	CCMT1204



Unit: mm

SIZE	CLASSIFICATION	EDP No.	A	B	C	D	E	SCREW	WRENCH	INSERT
SBC08-90		P2775462	08	08	6.3	8.4	70	SSB-2506	T7	CCMT0602
SBC10-90		P2775463	10	10	7	10.4	70	SSB-2506	T7	CCMT0602
SBC13-90		P2775464	13	13	10	13.6	80	SSB-4009	T15	CCMT09T3
SBC16-90		P2775465	16	16	11	16.7	100	SSB-5012	T15	CCMT1204
SBC19-90		P2775466	19	19	11	19.7	100	SSB-5012	T15	CCMT1204
SBC25-90		P2775467	25	25	12.5	25.7	120	SSB-5012	T15	CCMT1204

YG-1 TOOLING SYSTEM

ACCESSORY & OTHERS



PULL STUD BOLT
PULL STUD BOLT & SPANNER

TOOL CLAMP

HEIGHT PRESETTER

COOLANT TUBE

TECHNICAL DATA : SHANK STANDARD

DIN 69871-SK / JIS B6339/MAS 403-BT / DIN 69893/ISO 12164-1-HSK


ANSI/ASME B5.50-CAT

DIN 228 (MORSE TAPER) : TANG / SCREW TYPE

NC DRILL CHUCK & OTHER TOOL HOLDERS

NC DRILL CHUCK

NC - BOHRFUTTER
MANDRIN DE PERÇAGE NC
NC MANDRINI PORTA PUNTE
PORTABROCAS PARA BROCAS NC



JIS B6339
-BT

Taper Accuracy: AT3

G Value: -

RPM: -

Coolant System: A

JIS B6339/MAS403-BT


TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D	L (Min.)	L1 (Max.)	WEIGHT (kg)
30	BT50-NP08-75	P2776016	0.3 - 8	36.5	75	80.7	0.80
	BT50-NP13-105	P2776017	1 - 13	50.4	105	115	1.80
	BT50-NP08-80	P2776018	0.3 - 8	36.5	80	85.7	1.50
40	BT60-NP08-110	P2776006	0.3 - 8	36.5	110	115.7	1.80
	BT60-NP08-150	P2776007	0.3 - 8	36.5	150	155.7	2.60
	BT60-NP13-95	P2776019	1 - 13	50.4	95	100.7	2.10
	BT60-NP13-130	P2776008	1 - 13	50.4	130	140	2.70
50	BT60-NP13-150	P2776003	1 - 13	50.4	150	160	3.40
	BT50-NP08-90	P2776009	0.3 - 8	36.5	90	95.7	4.20
	BT50-NP08-110	P2776010	0.3 - 8	36.5	110	115.7	4.50
	BT50-NP08-170	P2776011	0.3 - 8	36.5	170	180.7	5.20
	BT50-NP13-105	P2776020	1 - 13	50.4	105	115	4.80
	BT50-NP13-130	P2776013	1 - 13	50.4	130	140	5.20
	BT50-NP13-150	P2776014	1 - 13	50.4	150	160	5.50
BT50-NP13-190	P2776015	1 - 13	50.4	190	200	5.90	

SK(DIN 69871) and CAT(ANSI B5.50) taper products available.

NC DRILL CHUCK & OTHER TOOL HOLDERS

NC DRILL CHUCK

NC - BOHRFUTTER
MANDRIN DE PERÇAGE NC
NC MANDRINI PORTA PUNTE
PORTABROCAS PARA BROCAS NC

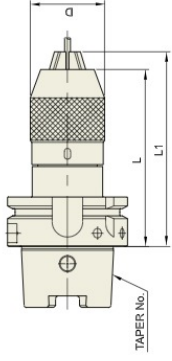

DIN 69893
-HSK

Taper Accuracy: -


G Value: -

RPM: -

Coolant System: A

DIN 69893/ISO 12164-1-HSK FORM A

TAPER No.	MODEL No.	EDP No.	CAPACITY	D	L (Min.)	L1 (Max.)	WEIGHT (kg)
40A	HSK40A-NP08-120	P2775202	0.3 - 8	36.5	120	125.7	1.00
	HSK40A-NP08-120	P2775203	0.3 - 8	36.5	120	125.7	1.20
50A	HSK50A-NP13-150	P2775201	1 - 13	50.4	150	160	2.10
	HSK50A-NP08-125	P2775204	0.3 - 8	36.5	125	130.7	2.10
63A	HSK63A-NP13-150	P2775205	1 - 13	50.4	150	150	3.00
	HSK63A-NP08-130	P2775206	0.3 - 8	36.5	130	135.7	4.80
100A	HSK100A-NP13-150	P2775207	1 - 13	50.4	150	160	5.50



STRAIGHT-K

TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D	L (Min.)	L1 (Max.)	d	WEIGHT (kg)
32	K32-NP08-75	P2776021	0.3 - 8	36.5	75	80.7	32	0.70
	K32-NP13-100	P2775252	1 - 13	50.4	100	110	32	1.50
42	K42-NP08-70	P2775253	0.3 - 8	36.5	70	75.7	42	0.80
	K42-NP13-100	P2775254	1 - 13	50.4	100	110	42	1.60